

**SIMULATION OF A HUMANOID SOCCER ROBOT
TEAM DESCRIPTION PROPOSAL FOR BRAZIL OPEN 2007
SAMA3D**

HAMID REZA MOHSENI NEJAD¹, ROYA HEMMATPOUR¹
AMIR KHERMANDAR¹, MOHAMMAD MAZINNANI¹, HOJJAT NIKAN¹

¹*Robotic Research Laboratory
Islamic Azad University of Karaj, Sama College
E-mail: sama3dsimulation@yahoo.com*

*Robotic Research Laboratory, Azad University of Karaj, Sama College
Azadegan Square, Karaj, Iran
Postal Box: 31485-165
Fax: +98 261 2210400*

Abstract— In this document the main idea of simulating an intelligent humanoid robot in a three dimensional environment is described. Based on the experienced in implementing and simulating soccer player agent in two dimensional environment and developing the high level algorithm in these kinds of agents, the first goal of simulating the humanoid soccer player is, maintaining the stability in different kind of movement such as walking, turning and kicking. For each kind of movement initial trajectories are created by an offline method. After applying these trajectories to the robot and imposing the stability tests on them, the necessary modifications and corrections is done to these trajectories and it is guaranteed that the robot can do movement without falling down or tip over. For reducing the huge mathematical computation and increasing the speed, an artificial neural network is trained for creating the modified trajectories.

Keywords— Zero Moment Point (ZMP), Inverse Kinematics, Trajectory Planning, Artificial Neural Networks (ANN), Radial Basis Functions (RBF), Spline Functions

1 Introduction

Biped robots have better mobility than conventional wheeled robots, especially for moving on rough and uneven terrain. Study of these robots and their stability has been the main focus of too many researchers in the last decades.

The main challenge in biped robot is the stability. Two measurements for stability are considered, static and dynamic. For static stability it is just required that the center of gravity (COG) is inside the support area. In this case we assume that the robot movement is so slowly that we can neglect its movement. But if the robot moves faster we can not rely on COG and it can not be used as a stability criterion anymore.

For achieving dynamic stability, more movement parameters should take into account. Because of nature of the robot, when it moves there are angular velocities and angular accelerations for each link that should be considered when we want to evaluate the dynamic movement and stability. In dynamic movement, trajectory planning for each kind of

movement plays an important rule. If no stable movement trajectory consider for these robots, they can easily fall down or tip over. In trajectory planning the smoothness of the trajectories should be realized so that the first and second derivative of the trajectories is continues. The first order derivative continuity guarantees the smoothness of the angular velocity and the second order derivative continuity guarantees the smoothness of the angular acceleration. Because all the trajectories are planned in Cartesian space they should be converted to joint space using inverse kinematics and it can be proved that if the first and second order derivative of the planned trajectories are continues in Cartesian space, they will be continues in joint space[1,2].

One of the most effective methods that has been used as a stability criteria in the dynamic movement is called Zero Moment Point (ZMP). The ZMP is defined as the point on the ground about which the sum of all the moments of active forces is equal to zero. The convex hull of the contact points between the feet and ground are called stable region, if the ZMP is inside the stable region, the robot is stable.

To achieve this goal, two methods has been suggested. In the first method a desired ZMP trajectory

is planned and the torso movement is considered in away the desired ZMP trajectory is realized .Based on the limitations that exist in this method; it is not possible for all the desired ZMP trajectories to be realized. In addition to, because there is no foot trajectory, this method will not work in rough and step terrains.

The other method that has been investigated, utilizes both foot and hip trajectories. In this method first, both foot and hip trajectories are implemented using a third-order Spline function. These Spline functions guarantee that first and second order derivative of trajectories in all the break points that have been used for implementing the functions are continues.

After planning trajectories, they should be applied to the robot. Now it's time to evaluate the trajectories using the ZMP stability criteria. If the ZMP requirement is met (ZMP is inside the stable region) no changes should be applied to the trajectories, otherwise we should modify the trajectories.

Because it is a time consuming procedure to change all the trajectories two parameters from the hip trajectory is chosen. By changing the value of these parameters through an iteration procedure and applying the ZMP stability criteria we can reach to the desired parameter values.

Aforementioned methods need heavy computational effort that impose a huge load on CPU and also reduces the walking speed. To decrease the computational load from CPU and increasing the movement speed, while marinating the stability we have considered the following idea.

The modified and corrected off-line trajectories that guarantee the stability are fed to an RBF artificial neural network as a training set. Then the network can be used as source of creating new modified trajectories for each movement.

2 Implementation

In this section the algorithm that has been implemented and simulated is described in more details. Figure 1 illustrates the system block diagram.

2.1 Off-line trajectories

In humanoid, for each kind of movement a predefined trajectory is needed. If both foot and hip trajectories are known, all joint trajectories of humanoid robot will be determined by the kinematics constraint[1,2] .To achieve the best stability, it's necessary to have smooth trajectories. Also it's required that at the start of walking cycle (one of the legs leaves the ground) and end of the cycle ,speed of the movement to be zero or near to zero, otherwise it severely causes the robot to tip over.

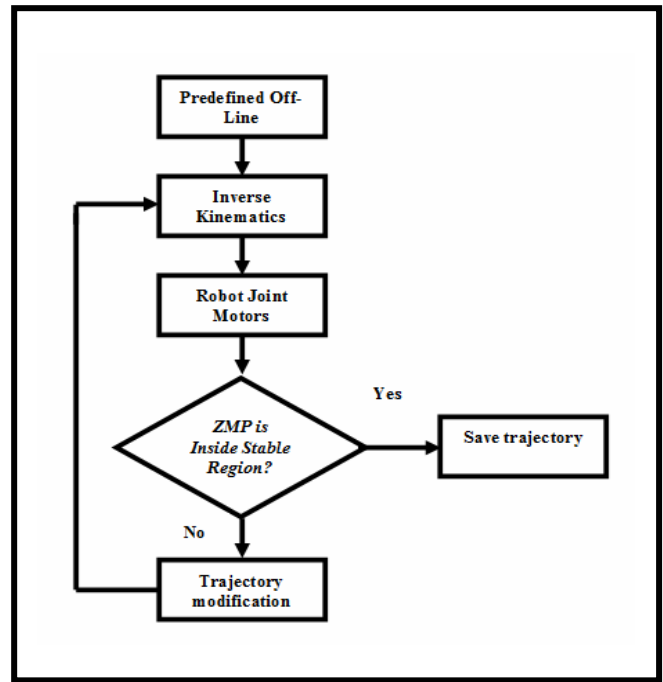


Figure1. Block diagram of the first phase

So considering a Spline function as it has been used in some other works sounds to be logical [1, 2, 3, 4]. As a trade-off, a third order Spline function can be used. This function can be implemented by defining some break points in the trajectory and take into account that the first and second derivative of trajectory should be continues at break points. Figure 2 shows foot trajectory and its first and second order derivative in z-axis. The trajectory has been implemented using cubic periodic Spline function in MATLAB®. As it can be seen from the figure, the first and second order derivative are continues.

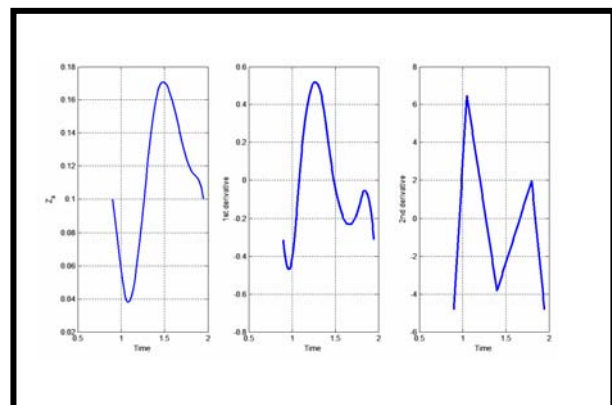


Figure2. Foot trajectory and its first and second order derivative in z-axis

2.2 Inverse Kinematics

Next step is applying the inverse kinematics. The attained trajectories should be converted from Cartesian space to joint space. By these equations the Cartesian values in the trajectories are changed to the motor angles and can be applied to the motors.

2.3 Stability Criteria

After issuing commands to the motors, now it's time to evaluate the predefined trajectory. For this means the ZMP point is calculated by the following equations.

$$x_{zmp} = \frac{\sum_{i=0}^n m_i (\ddot{z}_i + g) x_i - \sum_{i=0}^n m_i \ddot{x}_i z_i - \sum_{i=0}^n I_{iy} \ddot{\Omega}_{iy}}{\sum_{i=0}^n m_i (\ddot{z}_i + g)} \quad (1)$$

$$y_{zmp} = \frac{\sum_{i=0}^n m_i (\ddot{z}_i + g) y_i - \sum_{i=0}^n m_i \ddot{y}_i z_i - \sum_{i=0}^n I_{ix} \ddot{\Omega}_{ix}}{\sum_{i=0}^n m_i (\ddot{z}_i + g)} \quad (2)$$

In the above formula, m_i is the mass of link i , I_{ix} , I_{iy} are the inertia of component, Ω_{ix} , Ω_{iy} are the absolute angular components around x and y axis and n is the number of link. For stability this point should be inside the stable region. If this point located outside the stable region we should do some correction in the joint space (trajectories) to prevent this instability.

Because in our robot there is 21 DOF, it is a required to decide what kind of modification in which joint motor can result in best stability. For feasibility one of the hip parameters is considered as a variable. Here after we do all our trajectory modification just on this parameter to achieve the best stability.

2.4 Reducing the CPU load and increasing the speed

The problem that exists in the previous algorithm is the amount of the calculations that is done by the CPU. For each movement a separate trajectory should be planned for the hip and foot. These trajectories have to go through a stability criteria check and the necessary modifications should be applied.

These procedures are time-consuming and impose heavy calculation load on CPU. Because most of the movements that we need in our work are repeated, once they have been designed and planned carefully, they could be used later through a learning process. This learning process is done by an artificial neural network. The type of the neural network that we have used in our work is a Radial Basis Function (RBF). Because this kind of networks has the capability of interpolating the polynomial functions, they

can be used for estimating and characterizing the trajectories that we have implemented by Spline functions. After extracting the modified trajectories we can use these data as a training set for RBF neural network. Once the network trained using the training set, it is ready to be as a source of generating the modified trajectories with the minimum amount of calculations.

We can use this trained network for the next trajectory generation whenever needed. As it can be seen from figure 3 for each movement we set the input parameters for the RBF networks and the networks generates the trajectory for this kind of movement.

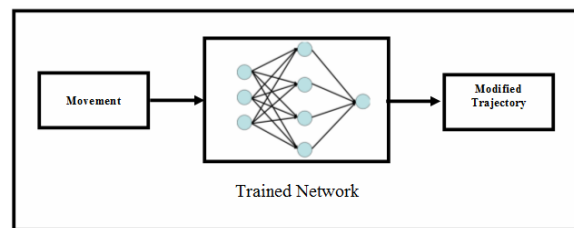


Figure3. A trained neural network

3 Conclusion and Current Works

Stability in humanoid robot is the main objective for each kind of movement. Also for soccer player robots it is compulsory that robot maintain its stability when it moves forward or backward or kicks. To assure a satisfactory stability a well designed trajectory in each of the movement is required so that it guarantees that the robot will be stable when it wants to do a movement.

Our team qualified in the 2007 Robocup in Atlanta competition for developing the first parts of our algorithm and the results that we sent to the technical committee of competitions.

Now we are applying the modified trajectories data to a RBF network using MATLAB[®] ANN toolbox, to obtain a trained network. Testing the output of our work in Rcssserver 5.5 that has been released recently shows satisfactory results.

We have also designed monitoring software that can easily monitors all the events that happen in the Simspark simulation environment and also can view all the stability test results, such as support polygon, ZMP point and so on. The vision system is fully utilized in this monitoring software .

Acknowledgment

This project is being supported by the Research Department of Azad University of Karaj, Sama College. The authors would like to thank Mr. Jahanian, Mrs. Mirnezami and Mr. Sarmadi for their suggestions and supports during all the phases of this project.

References

- [1] Q. Huang, S. Kajita, N. Koyachi, K. Kaneko, K. Yokoi, H. Akira, K. Komoriya, K. Tanie, "A High Stability, Smooth Walking Pattern for a Biped Robot", *Proceeding of the 1999 IEEE, International Conference on Robotic & Automation*, Detroit, Michigan, May 1999
- [2] Z. Tang, Ch. Zhou, Z. Sun, "Trajectory Planning for Smooth Transition of a Biped Robot", *Proceeding of 2003 IEEE, International Conference on Robotic & Automation*, Taiwan, September 14-19, 2003
- [3] Z. Peng, Q. Huang, X. Zhao, T. Xiao, K. Li, "Online Trajectory Generation Based on Off-line trajectory for Biped Humanoid", *Proceeding of 2004 IEEE, International Conference on Robotic & Biomimetics*, August 22-26, 2004, Shenyang, China
- [4] Erik Cuevas, Daniel Zaldivar, Raul Roajas, "Walking Trajectory for a biped robot", Technical report B-04-018, University of Berlin, Information Institute, November 16, 2004
- [5] B. D. Bojanov, H. A. Hakopian and A. A. Sahakian, "Spline Function and Multivariate Interpolation", Kluwer Academic Publishers, 1993
- [6] Ch. Zhou, P. Kong, Yue, Jun, Ni, Sh. Chan, "Dynamically Stable gait Planning for a Humanoid Robot to Climb Sloping Surface", *Proceeding of the 2004 IEEE Conference on Robotic, Automation and Mechatronics*, Singapore, December 2004
- [7] Kuffner, J., Nishiwaki, K., Kagami, S., Inaba, M., & Inoue, H. (2003), "Motion planning for humanoid robots", *Proceeding of 11th international symposium of Robotic Researchs*. (ISRR 2003)
- [8] T. Sugihara, Y. Nakamura, H. Inoue, "Realtime humanoid motion generation through ZMP manipulation based on inverted pendulum control", *Proceedings of the 2002 IEEE International Conference on Robotics & Automation* Washington, DC . May 2002
- [9] S. Kajita, F. Kanehiro, K. Kaneko, K. Kujiwara, K. Harada, K. Yokoi, H. Hiukawa, "Biped walking pattern generation by using preview control of Zero-Moment Point", *Proceedings of the 2003 IEEE International Conference on Robotics & Automation Taipei, Taiwan, September 14-19, 2003*